



# COMBINATOR




THE COMBINATOR HAS BEEN SPECIALLY DEVELOPED FOR WORK ON GRASSY AREAS. THE MACHINE CAN MILL TO UP TO 5 CM, MAKING IT SUITABLE FOR BOTH FRASE MOWING AND VERTICUTTING. THE MILLING IS DONE BY MEANS OF A SPECIAL ROTOR AXIS EQUIPPED WITH ONE TYPE OF BLADES. THE MULTIFUNCTIONAL ROTOR AXIS IS ALSO SUITABLE FOR SCARIFYING.



IN ADDITION TO THE USE ON NATURAL GRASS, IT IS ALSO POSSIBLE TO USE THE COMBINATOR FOR THE REMOVAL OF INFILL MATERIAL ON ARTIFICIAL TURF. WITH A SPECIAL BRUSH THE INFILL MATERIAL CAN EASILY BE BRUSHED OFF OF THE FIELD.



BY MEANS OF AN OPTIONAL ELEVATOR BELT THE MILLED OR BRUSHED MATERIAL CAN BE EFFICIENTLY COLLECTED AND DISPOSED OF OR RE-USED. THE ELEVATOR BELT CAN BE FOLDED AWAY NEATLY ONTO THE MACHINE FOR TRANSPORT & STORAGE. THE COMBINATOR IS AVAILABLE IN FOUR DIFFERENT MODELS.

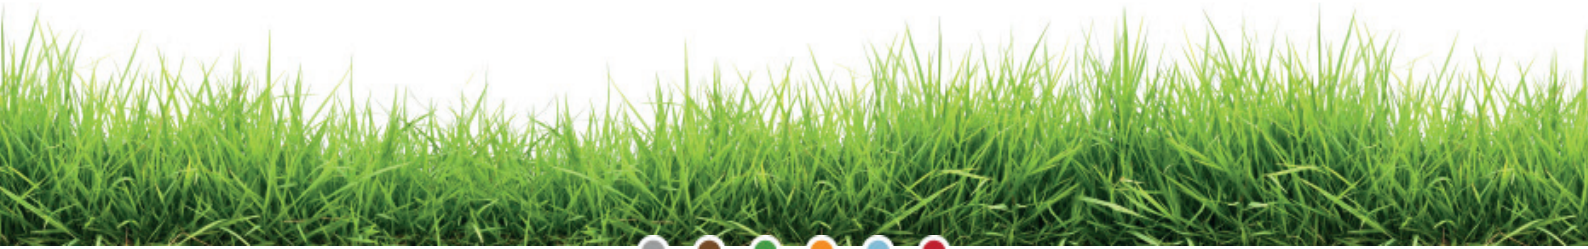





# COMBINATOR

## CB-120

- WORKING WIDTH: 1,2 MTR
- WORKING DEPTH: MAX. 5 CM
- WORKING DEPTH VERTICUTTING: MAX. 4 CM (C.D. 2,0 / 4,0 / 6,0 / 8,0 CM)
- DIMENSIONS OPERATION/TRANSPORT: 1,4x3,0x1,2 / 1,4x1,6x1,0 MTR (LXWXH)
- WEIGHT: 500 KG
- POWERCONSUMPTION: > 35 HP
- LINKAGE: STANDARD 3 POINT CAT I
- 1X DOUBLE ACTING HYDRAULIC VALVE / TRANSPORT UNIT (20 L/MIN)
- 1X DOUBLE ACTING HYDRAULIC VALVE / CYLINDER SIDEBELT (20 L/MIN)

## CB-160

- WORKING WIDTH: 1,6 MTR
- WORKING DEPTH: MAX. 5 CM
- WORKING DEPTH VERTICUTTING: MAX. 4 CM (C.D. 2,5 / 5,0 / 7,5 / 10,0 CM)
- DIMENSIONS OPERATION/TRANSPORT: 1,6x4,0x1,8 / 1,6x2,05x1,0 MTR (LXWXH)
- WEIGHT: 950 KG
- POWERCONSUMPTION: > 55 HP
- LINKAGE: STANDARD 3 POINT CAT II
- 1X DOUBLE ACTING HYDRAULIC VALVE / TRANSPORT UNIT (40 L/MIN)
- 1X DOUBLE ACTING HYDRAULIC VALVE / CYLINDER SIDEBELT (40 L/MIN)

## CB-200

- WORKING WIDTH: 2,0 MTR
- WORKING DEPTH: MAX. 5 CM
- WORKING DEPTH VERTICUTTING: MAX. 4 CM (C.D. 2,5 / 5,0 / 7,5 / 10,0 CM)
- DIMENSIONS OPERATION/TRANSPORT: 1,6x4,0x1,8 / 1,6x2,05x1,0 MTR (LXWXH)
- WEIGHT: 1100 KG
- POWERCONSUMPTION: > 75 HP
- LINKAGE: STANDARD 3 POINT CAT II
- 1X DOUBLE ACTING HYDRAULIC VALVE / TRANSPORT UNIT (40 L/MIN)
- 1X DOUBLE ACTING HYDRAULIC VALVE / CYLINDER SIDEBELT (40 L/MIN)

## CB-240

- WORKING WIDTH: 2,0 MTR
- WORKING DEPTH: MAX. 5 CM
- WORKING DEPTH VERTICUTTING: MAX. 4 CM (C.D. 2,5 / 5,0 / 7,5 / 10,0 CM)
- DIMENSIONS OPERATION/TRANSPORT: 1,7x4,4x2,0 / 1,7x2,85x1,1 MTR (LXWXH)
- WEIGHT: 1400 KG
- POWERCONSUMPTION: > 90 HP
- LINKAGE: STANDARD 3 POINT CAT II
- 1X DOUBLE ACTING HYDRAULIC VALVE / TRANSPORT UNIT (50 L/MIN)
- 1X DOUBLE ACTING HYDRAULIC VALVE / CYLINDER SIDEBELT (50 L/MIN)

GKB MACHINES  
MIDDELWEG 1  
2992 SP BARENDRECHT  
NEDERLAND

WWW.GKBMACHINES.COM  
INFO@GKBMACHINES.COM  
TEL.: +31(0)180 64 29 22  
FAX: +31(0)180 62 09 23