




SANDFILLER



THE SANDFILLER IS DESIGNED TO COUNTER THATCH ON GOLF COURSES AND ESPECIALLY THE GREENS. BECAUSE THE TOP LAYER IS SCARIFIED AND OPTIONALLY FILLED WITH SAND, IT CREATES A GOOD AERATION AND DRAINAGE OF THE FIELD.

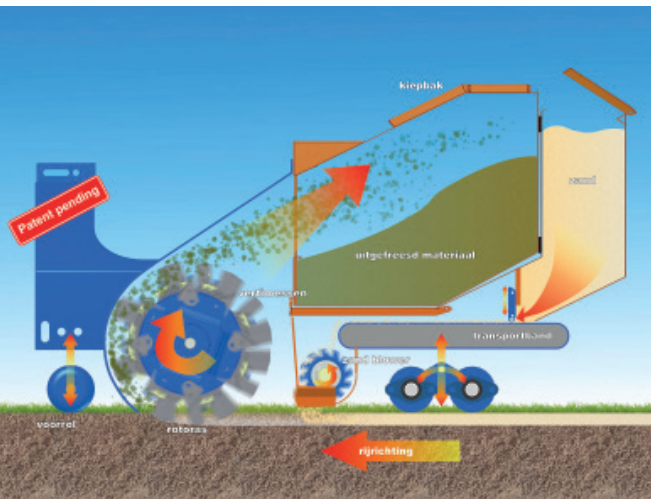

THREE HEIGHT-ADJUSTABLE LOAD-BEARING ROLLERS ALLOW FOR THE MACHINE TO FOLLOW THE CONTOURS OF THE SURFACE. THE (COMBI-) ROTOR CAN BE FOUND BETWEEN THESE ROLLERS, AND CAN BE USED TO SCARIFY AND FRASE MOW.



THE DRIED SAND IS DEPOSITED IN THE FUNNEL SHAPED BUNKER. THE SAND INLET IS HYDRAULICALLY CONTROLLED BY AN ADJUSTABLE CONTROL VALVE ON THE SIDE OF THE MACHINE. THE EXCESS MATERIAL, OBTAINED FROM SCARIFYING OR MOWING THE TOP LAYER, IS COLLECTED IN A LATERAL TILTING BIN.



