




TOPDROP




THE GKB TOPDROP IS THE IDEAL MACHINE FOR THE APPLICATION OF TOP LAYERS. THE ROTATING BRUSH DRESSER CAN DISTRIBUTE ALL KINDS OF LOOSE MATERIAL, E.G. SAND, GRAVEL OR RUBBER, ON FIELDS. THE ROTATING BRUSH IS HYDRAULICALLY DRIVEN AND IS EASILY ADJUSTABLE IN SPEED.

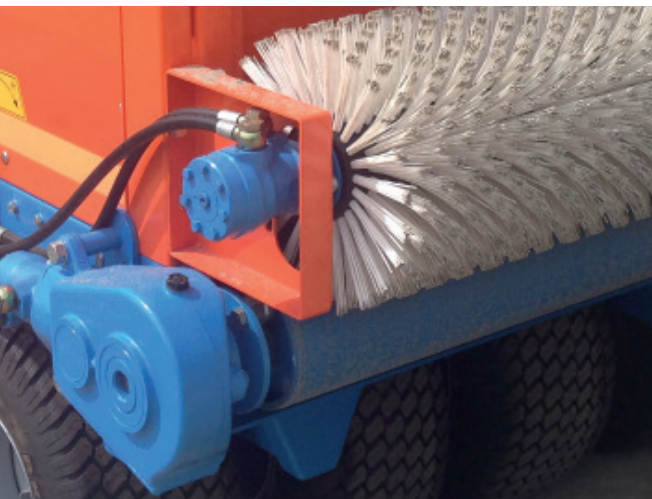

BY ADJUSTING THE BRUSH SPEED FROM WITHIN THE TRACTOR AND ADJUSTING THE MECHANICAL METERING VALVE, THE LAYER THICKNESS CAN BE DETERMINED PRECISELY.



THE MACHINE CAN BE USED ANYWHERE THANKS TO THE FOUR PIVOTING BALLOON TIRES. THESE ENSURE OPTIMUM GROUND PRESSURE SO THAT THE BURDEN ON THE SURFACE IS KEPT TO A MINIMUM. THE TOPDROP IS AVAILABLE IN THREE DIFFERENT MODELS, AND CAN BE CUSTOMIZED WITH VARIOUS EXTRA OPTIONS.

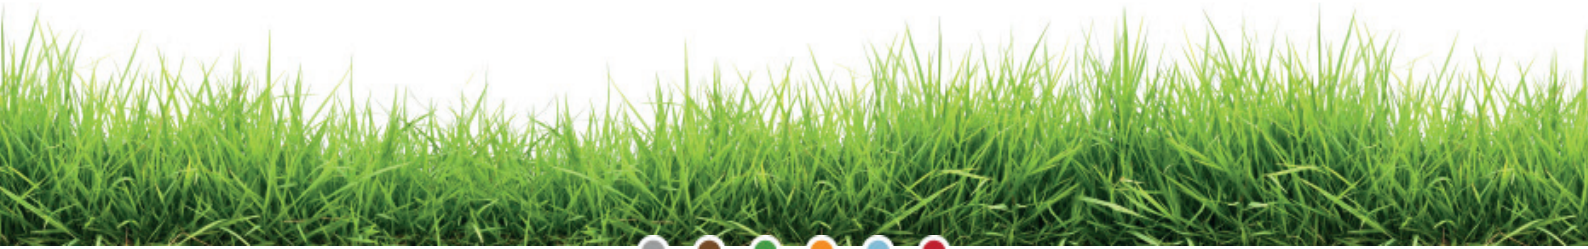



TOPDROP

TD-130

- WORKING WIDTH: 1,4 MTR
- LAYER THICKNESS: VARIABLE
- DIMENSIONS OPERATION/TRANSPORT: 2,9x1,7x1,6 MTR (LXBXH)
- WEIGHT: 775 KG (EMPTY)
- CAPACITY SANDHOPPER: 1,3 M³
- POWERCONSUMPTION: > 25 HP
- LINKAGE: DRAWBAR EYE
- 1X DOUBLE ACTING HYDRAULIC VALVE / BRUSH AND SANDBELT (25 L/MIN)

TD-230

- WORKING WIDTH: 1,4 MTR
- LAYER THICKNESS: VARIABLE
- DIMENSIONS OPERATION/TRANSPORT: 4,0x1,7x1,6 MTR (LXBXH)
- WEIGHT: 850 KG (EMPTY)
- CAPACITY SANDHOPPER: 2,3 M³
- POWERCONSUMPTION: > 35 HP
- LINKAGE: DRAWBAR EYE
- 1X DOUBLE ACTING HYDRAULIC VALVE / BRUSH AND SANDBELT (25 L/MIN)

TD-330

- WORKING WIDTH: 2,0 MTR
- LAYER THICKNESS: VARIABLE
- DIMENSIONS OPERATION/TRANSPORT: 4,0x2,3x1,6 MTR (LXBXH)
- WEIGHT: 1500 KG (EMPTY)
- CAPACITY SANDHOPPER: 3,3 M³
- POWERCONSUMPTION: > 50 HP
- LINKAGE: DRAWBAR EYE
- 1X DOUBLE ACTING HYDRAULIC VALVE / BRUSH AND SANDBELT (25 L/MIN)

GKB MACHINES
MIDDELWEG 1
2992 SP BARENDRECHT
NEDERLAND

WWW.GKBMACHINES.COM
INFO@GKBMACHINES.COM
TEL.: +31(0)180 64 29 22
FAX: +31(0)180 62 09 23