

# WOODS

## LANDSCAPE EQUIPMENT



A full line of tools to  
tackle a variety of yard  
and garden projects

## Landscape Equipment

### Table of Contents

#### **Rear Blades** ..... 4

Grading dirt or driveways, cleaning up construction sites, or moving snow – rely on Woods durable rear blades for maximum performance.

#### **Box Scrapers** ..... 8

From the reinforced steel A-frame to the tough, reversible cutting edge, our Woods and Gannon brand box scrapers deliver exceptional quality and versatility.

#### **Grading Scrapers** ..... 12

Woods grading scrapers are designed to handle more material in fewer passes.

#### **Landscape Rakes** ..... 14

Woods landscape rakes are built for both tough clean-up jobs and fine raking.

#### **Power Rakes** ..... 16

Utilizing a heavy frame and large, triple-sealed bearing drive, Woods power rakes tackle jobs ranging from preparing landscape seed beds to removing rock and debris.

#### **Core Aerators** ..... 17

Woods professional-grade core aerators help reduce soil compaction in heavy soil conditions.

#### **Seeder** ..... 18

This versatile Woods Precision Super Seeder can handle primary seeding, over-seeding, inter-seeding, and applications such as native grasses and food plots.

#### **Pulverizers** ..... 20

Loosen, level and pulverize a wide variety of materials using these Woods professional-grade pulverizers.

#### **Rotary Tillers** ..... 22

Woods' line of forward and reverse rotation tillers couple the best design features with outstanding performance for your landscaping and gardening projects.

#### **Post Hole Diggers** ..... 26

Whatever the soil conditions, count on Woods post hole diggers for tree and shrub planting, deck or fence post installation and many other digging needs.

#### **Chippers and Shredders** ..... 28

Woods chippers and chipper/shredders are PTO-driven with a three-point hitch mount to make quick work of creating mulch for your garden or clearing new-growth trees.

#### **Stump Grinders** ..... 30


Reduce tree stumps to mulch in minutes and grind below ground level with a Woods PTO-powered stump grinder.

#### **Disc Harrows** ..... 31

Woods disc harrows are durable tillage tools designed specifically for homes, small farms and nurseries.

#### **Quick Hitch** ..... 31

Woods quick hitch makes easy work of changing from one three-point attachment to another.

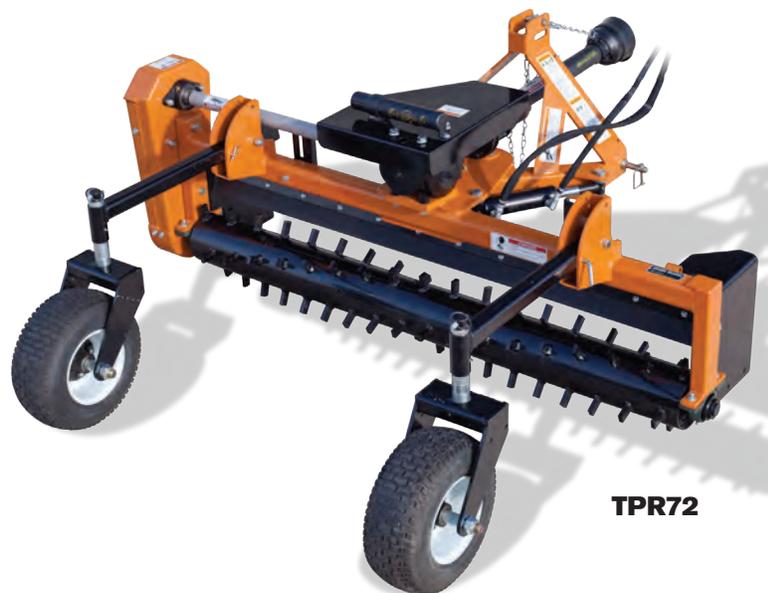

**TPR72**

## Legend

### Standard Duty

Designed and manufactured for typical usage and basic applications.

### Medium Duty

Designed and manufactured for harsher usage and more robust applications.

### Heavy Duty

Designed and manufactured for extended usage and the most demanding applications.



Woods products are proudly made in the USA. As part of a global economy, we work with business partners around the world and export our equipment to international markets. Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.



Maintain the quality and performance of your Woods equipment with WoodsCare genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

### Find a Woods Dealer

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at [woodsequipment.com](http://woodsequipment.com) or call 800-319-6637.

## Power to be more productive

Whether your landscape projects are contained in your own backyard or the way you make your living, you want equipment that's easy to use, easy to maintain, and built to last. That's what Woods delivers.

We build a full line of tools to tackle a variety of projects, such as putting in a new garden, reshaping a driveway, or seeding a lawn. We'll help you get the most out of the investment you've made in your tractor. And, at the end of the day, we'll help you feel good about all the chores you checked off your list.

Put it all together and you've got Woods Power – the power to be more productive.



PSS84\*

\* Base seeder with cool season seed box and front disc blades, plus optional legume seed box, warm season seed box and cultipacker

# WOODS

## Rear Blades

Rear Blades



**HBL84-2** Shown with optional tailwheel

Grading dirt or driveways, cleaning up construction sites, or moving snow – rely on Woods durable grading blades for maximum performance.

- Exceptional rigidity and strength from formed, curved moldboards
- 360-degree pivoting blade with forward and reverse positions
- Full line of blades to guarantee the right fit for your tractor and job
- Faster, easier and safer hook-ups with ASAE quick-hitch compatibility

## Standard-Duty

Tractor HP range: up to 25 hp

### Model

**RBC60** 5-foot

- Three-point hitch: Cat 0, Limited 1 and 1
- 360-degree pivoting blade with five forward and five reverse positions
- Reversible/replaceable high-carbon cutting edge
- Convenient parking stand

Tractor HP range: 12–40 hp

### Models

**RB60** 5-foot

**RB72** 6-foot

**RB84** 7-foot

- Three-point hitch: Cat 0 and 1
- 360-degree pivoting blade with five forward and three reverse positions
- Reversible/replaceable high-carbon cutting edge
- Convenient parking stand

## Medium-Duty

Tractor HP range: 30–75 hp

### Models

<b>HBL72-2</b>	6-foot
<b>HBL84-2</b>	7-foot
<b>HBL96-2</b>	8-foot

- Three-point hitch: Cat 1 and 2
- Five forward and five backfill angles, plus six offset positions
- Reversible/replaceable high-carbon cutting edge
- Convenient parking stand



RB850

## Heavy-Duty

Tractor HP range: 50–100 hp

### Models

<b>RB750</b>	7-foot
<b>RB850</b>	8-foot

- Three-point hitch: Cat 2 and 3
- Seventeen-inch-high, reinforced moldboard
- Optional end plates, skid shoes, and tailwheel
- Convenient parking stand

Tractor HP range: 80–150 hp

### Model

<b>RB990</b>	9-foot
<b>RB1010</b>	10-foot

- Three-point hitch: Cat 2 and 3
- Available as fully hydraulic, fully manual, or combination cylinder options
- Fully hydraulic models allow precise blade and material control (angle, tilt, and offset)
- Tough, dozer-type full box construction
- Eighteen-inch-high, reinforced moldboard for maximum material loading
- Optional end plates, skid shoes and tailwheel
- Convenient parking stand

## Rear Blades

Specifications	RBC60	RB60	RB72	RB84
<b>Tractor Engine HP</b>	up to 25 hp	12–30 hp	12–40 hp	
<b>Tractor Hitch</b>	Cat 0, limited 1 and 1	Cat 0 and 1	Cat 1	
<b>Moldboard Length</b>	59"	59"	71"	83"
<b>Moldboard Height</b>	9.7"	14"		
<b>Moldboard Thickness</b>	.179"	.188"	.25"	
<b>Approximate Weight</b>	182 lbs	262 lbs	283 lbs	304 lbs
<b>Pivot Angle</b>	360°, 5 forward, 5 reverse	360°, 5 forward, 3 reverse		
<b>Tilt</b>	–	15°, 3 position		
<b>Offset</b>	12" left or right			
<b>End Plates</b>	–	–	optional	
<b>Skid Shoes</b>	optional			
<b>Tailwheel</b>	–	–	–	–
<b>ASAE Quick Hitch Compatible</b>	yes			
<b>Parking Stand</b>	standard			
	Standard-Duty			

HBL72-2	HBL84-2	HBL96-2	RB750	RB850	RB990	RB1010
30–75 hp			50–100 hp		80–150 hp	
Cat 1 and 2			Cat 2 and 3			
71"	83"	95"	83"	95"	107"	119"
18"			17"		18"	
.313"					.25"	
530 lbs	565 lbs	600 lbs	810 lbs	855 lbs	1,483 lbs	1,535 lbs
360°, 5 forward and 5 reverse			360°, 9 forward and 5 reverse		360°, hydraulic	
5 position			up to 30°		up to 28°	
4", 10" or 16" left or right			up to 23.5" left or right			
optional					–	–
optional					–	–
optional						
yes						
standard						
Medium-Duty			Heavy-Duty			

# WOODS

## Box Scrapers

Box Scrapers



Tackle the toughest spreading and grading jobs with Woods and Gannon brand box scrapers. From the reinforced steel A-frame to the tough, reversible cutting edge and replaceable scarifiers, our box scrapers deliver exceptional durability and versatility.

- Easily carve into sod and dirt with full-length, high-strength double beveled cutting edges
- Tackle the most rugged jobs with high-strength moldboards
- Choose widths from 48- to 96-inches to suit a variety of jobs
- Ensure faster, easier and safer hook-ups with ASAE quick-hitch compatibility

BSS72

## Standard-Duty

Tractor HP range: up to 25 hp

**Model**  
**GBC48** 48-inch

- Three-point hitch: Cat 0, Limited 1 and 1
- End Plates: .179-inch
- Half-inch by six-inch reversible beveled cutting edges
- Four adjustable, 3-position scarifiers
- Fourteen and one-half-inch moldboard

Tractor HP range: up to 45 hp

**Models**  
**BSS54** 54-inch  
**BSS60** 60-inch  
**BSS65** 65-inch  
**BSS72** 72-inch

- Three-point hitch: Cat 1
- End plates: .38-inch
- Heavy steel plate A-frame mast
- Reversible/beveled high-carbon cutting edges



**BSM84**

## Medium-Duty

Tractor HP range: 40–65 hp

**Models**

**BSM72** 72-inch

**BSM84** 84-inch

- Three-point hitch: Cat 1
- The BSM Series offers an optional floating, hinged tailgate to provide maximum down force on the cutting edge
- End plates: .5-inch
- Quarter-inch plate welded inside of end plates to increase life

Specifications	GBC48	BSS54	BSS60	BSS65	BSS72	BSM72	BSM84
<b>Tractor Engine HP</b>	up to 25 hp	up to 45 hp				40–65 hp	
<b>Tractor Hitch</b>	Cat 0, Limited 1 and 1	Cat 1					
<b>Working Width</b>	48"	54"	60"	65"	72"		84"
<b>Approximate Weight</b>	285 lbs	486 lbs	514 lbs	528 lbs	551 lbs	680 lbs	750 lbs
<b>Capacity</b>	6.8 ft. <sup>3</sup>	10.3 ft. <sup>3</sup>	11.5 ft. <sup>3</sup>	12.5 ft. <sup>3</sup>	13.8 ft. <sup>3</sup>	13.8 ft. <sup>3</sup>	16.2 ft. <sup>3</sup>
<b>End Plate Thickness</b>	.179"	.375"				.5"	
<b>Moldboard Thickness</b>	.188"					.25"	
<b>Scarifier Depth</b>	0"–1.5"	0", 1.5" or 3" adjustable					
<b>Number of Scarifiers</b>	4	4	5	5	6	6	7
<b>Tailgate Type</b>	fixed					fixed, floating optional	
<b>Cutting Edges</b>	2						
<b>ASAE Quick Hitch Compatible</b>	yes						
	Standard-Duty					Medium-Duty	

# WOODS

## Industrial Box Scrapers

Industrial Box Scrapers



Take advantage of the Gannon® name recognized throughout the construction industry as having superior durability, quality and strength.


- Ideal for landscapers, farmers, contractors, and municipalities
- Scarify, level, grade and backfill

**92HSD**

Specifications	72HSD	76HSD	80HSD	84HSD	88HSD	92HSD	80HXD	84HXD	88HXD	92HXD	96HXD	
<b>Tractor Engine HP</b>	40–90 hp						40–100 hp					
<b>Tractor Hitch</b>	Cat 2											
<b>Working Width</b>	72"	76"	80"	84"	88"	92"	80"	84"	88"	92"	96"	
<b>Height</b>	24.5"											
<b>Operating Weight</b>	1,230 lbs	1,247 lbs	1,263 lbs	1,280 lbs	1,297 lbs	1,310 lbs	1,236 lbs	1,280 lbs	1,297 lbs	1,310 lbs	1,327 lbs	
<b>Depth</b>	40.188"											
<b>Heaped Capacity</b>	25.7 ft. <sup>3</sup>	27.0 ft. <sup>3</sup>	28.6 ft. <sup>3</sup>	30.0 ft. <sup>3</sup>	31.6 ft. <sup>3</sup>	32.9 ft. <sup>3</sup>	28.6 ft. <sup>3</sup>	30.0 ft. <sup>3</sup>	31.6 ft. <sup>3</sup>	32.9 ft. <sup>3</sup>	34.3 ft. <sup>3</sup>	
<b>End Plate Thickness</b>	.5"											
<b>Replacement End Plate Wear Bits</b>	yes						no					
<b>Number of Cutting Edges</b>	2											
<b>Cutting Edge Size</b>	.5" x 6"											
<b>Number of Shanks</b>	8											
<b>Tailgate</b>	-	-	-	-	-	-	-	-	-	-	-	
	Heavy-Duty											

**Backfill Moldboard**

Available in full height (shown) for maximum strength and capacity, or hinged tailgate for precise grading.

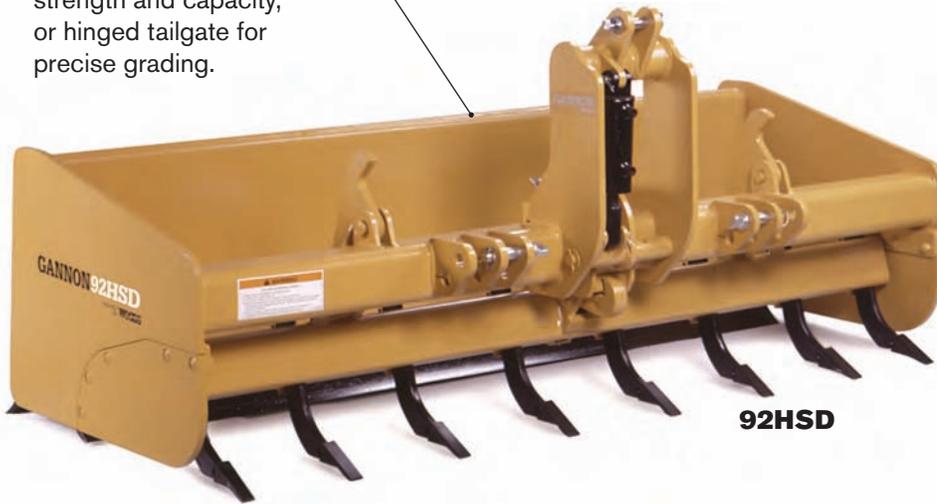

# Industrial 4 x 2 and 4 x 4 Series

Tractor HP range: 40–100 hp

- Three-point hitch: Cat 1 and 2
- Available in 65- to 96-inch widths
- Large capacity box – no gussets or bars to obstruct material boiling
- Unique “Maxi-load” shape moldboard minimizes tractor drag
- Replaceable, heat-treated scarifier teeth and replaceable side-wear plates available (on some models)
- Reversible/replaceable high-carbon cutting edges

**Interchangeable and Reversible Cutting Edges**

Strong, wear-resistant cutting edges are interchangeable and reversible.

65LB		65HB		72LB		72HB		76LB		76HB		80LB		80HB		84HB			
40–80 hp																			
Cat 1 and 2																			
65"				72"				76"				80"				84"			
19.313"		24.5"		19.313"		24.5"		19.313"		24.5"		19.313"		24.5"					
925 lbs		1,020 lbs		1,002 lbs		1,100 lbs		1,040 lbs		1,140 lbs		1,075 lbs		1,170 lbs		1,200 lbs			
39.5"																			
20.8 ft. <sup>3</sup>		23.2 ft. <sup>3</sup>		23.0 ft. <sup>3</sup>		25.7 ft. <sup>3</sup>		24.3 ft. <sup>3</sup>		27.3 ft. <sup>3</sup>		25.7 ft. <sup>3</sup>		28.6 ft. <sup>3</sup>		30.0 ft. <sup>3</sup>			
.5"																			
no																			
2																			
.5" x 6"																			
6				8															
yes																			
Heavy-Duty																			

# WOODS

## Grading Scrapers

Grading Scrapers



GS72C

**Woods grading scrapers are designed to handle more material in fewer passes.**

- Heavy-duty mast plate creates more down force for smoother surface and virtually eliminates washboard effect
- Adjustable skid shoes and scarifiers increase performance
- Tall side frames hold more material for leveling
- Approachable leading edges and structural reinforcements keep scraper stronger for longer
- Reversible/replaceable high-carbon cutting edges

### Standard-Duty

Tractor HP range: 15–30 hp

#### Models

**GS54S** 53-inches

- Three-point hitch: Limited Cat 1 and 1
- Designed for subcompact tractors
- Fourteen-inch box height
- Faster, easier and safer hook-ups with ASAE quick-hitch compatibility

Tractor HP range: 20–45 hp

#### Models

**GS60C** 59-inches

**GS72C** 71-inches

**GS84C** 83-inches

- Three-point hitch: Cat 1
- Designed for compact tractors
- Sixteen-inch box height – one of the tallest in the industry
- Faster, easier and safer hook-ups with ASAE quick-hitch compatibility



**Whether you have a gravel driveway or a show arena, Woods grading scrapers are the right tools. Build or restore areas to pristine condition for driving or playing.**

**Heavy Mast Plate**

Solid mast plate provides increased weight for greater down force and constant ground contact.

**Reinforced Back**

Reinforcement bar maintains strength and handles heavier material without compromising structure.

**GS84C****Replaceable Scarifiers**

Replaceable scarifiers with hardened points increases durability and versatility.

**Adjustable Skid Shoe**

Replaceable, heavy skids wear longer. Outside adjustment allows for quick changes.

Specifications	GS54S	GS60C	GS72C	GS84C
<b>Tractor Engine HP</b>	15–30 hp		20–45 hp	
<b>Tractor Hitch</b>	Limited Cat 1 and Cat 1		Cat 1	
<b>Working Width</b>	53"	59"	71"	83"
<b>Overall Width</b>	58"	64"	76"	88"
<b>Overall Length</b>	42"		46"	
<b>Box Height</b>	14"		16"	
<b>Weight</b>	409 lbs	553 lbs	655 lbs	752 lbs
<b>Number of Shanks</b>		4	5	6
<b>Reversible Cutting Edge</b>			.5" x 6"	
<b>Replaceable Scarifiers</b>	-4.0, -2.5, -1.0, +1.0		-2.5, -1.0, +0.5, +2.5	
<b>Lower Hitch Design</b>			Clevis	
<b>Skid Shoe Adjustment</b>	-0.75 to +0.75		-1.0 to +0.5	
	Standard-Duty			

# WOODS

## Landscape Rakes



**Woods landscape rakes are built with rugged durability for tough clean-up jobs, as well as fine raking features for light-duty lawn care and general maintenance.**

- High-strength, box-type beams and spring-steel tines handle rocks, dirt, and sand
- Adjustable angles and 360-degree pivot control flow of material to left, right, or center
- One-inch tine spacing provides superior material collection for a smooth, even grade

LR107-2 with optional gauge wheels, grader blade and end caps

## Standard-Duty

Tractor HP range: up to 25 hp

**Model**  
**LRC60** 5-foot

- Three-point hitch: Cat 0, Limited 1 and 1
- Specifically designed for subcompact and compact tractors
- Adjustable rake offers five forward, five reverse positions
- Compact rake perfect for leveling and spreading topsoil and gravel, and removing stones and trash
- Thirty heat-treated, carbon steel tines
- Dual-gauge wheel option

Tractor HP range: 12–40 hp

**Model**  
**LR72** 6-foot

- Three-point hitch: Cat 0 and 1
- Five forward, three reverse angles adapt to your job and its conditions

## Medium-Duty

Tractor HP range: 12–40 hp

### Models

**LR106-2** 6-foot  
**LR107-2** 7-foot  
**LR108-2** 8-foot

- Three-point hitch: Cat 1
- Tine beam designed for tough conditions
- Bolted tine attachment keeps teeth secure
- Optional dual-gauge wheels for depth control

## Heavy-Duty

Tractor HP range: 20–60 hp

### Models

**LR700** 7-foot  
**LR800** 8-foot

- Three-point hitch: Cat 1 and 2
- Suited for landscape grooming, seed bed preparation, general maintenance and the toughest construction-grade projects
- Dual-gauge wheel or single-tail wheel options
- Twenty-four adjustable rake angles and offset positions accommodate many conditions
- Optional flip-down grader blade adds grading and leveling capabilities

Specifications	LRC60	LR72	LR106-2	LR107-2	LR108-2	LR700	LR800
<b>Tractor Engine HP</b>	up to 25 hp	12–40 hp		20–40 hp		20–60 hp	
<b>Tractor Hitch</b>	Cat 0, Limited 1 and 1	Cat 0 and 1	Cat 1			Cat 1 and 2	
<b>Rake Width</b>	60"	72"		84"	96"	84"	96"
<b>Approximate Weight</b>	177 lbs	270 lbs	305 lbs	332 lbs	359 lbs	377 lbs	405 lbs
<b>Rake Angle Positions</b>	5 forward, 5 reverse	5 forward, 3 reverse				360°	
<b>Angle Increments</b>	15°						
<b>Offset</b>	–	–	–	–	–	8", 15" and 22" left or right	
<b>Tines</b>	.313" x 1" spring-steel						
<b>Gauge Wheels</b>	optional						
<b>Flip Down Grader Blades</b>	–	–	optional				
<b>Grader Blade End Caps</b>	–	–	optional				
<b>Tailwheel</b>	–	–	–	–	–	optional	
<b>Hydraulic Angle</b>	–	–	–	–	–	optional	
<b>ASAE Quick Hitch Compatible</b>	yes						
<b>Parking Stand</b>	standard						
	Standard Duty		Medium Duty			Heavy Duty	

# WOODS

## Power Rakes



**TPR72**

Utilizing a heavy frame and large, triple-sealed bearing drive, Woods power rakes provide years of performance in the toughest conditions.

- Perfect for a variety of jobs: preparing landscape seed beds, removing rock and debris from construction projects, reconditioning baseball diamond infields and grooming walking paths
- Patented power roller system pulverizes tough, compacted soil into a smooth grade in a single pass
- Side shields allow for moving more dirt to fill in low spots and have a quick-flip design with a single pin

### Standard-Duty

Tractor PTO HP range: 20–35 hp

<b>Model</b>	
<b>TPR60</b>	5-foot
<b>TPR72</b>	6-foot

### Medium-Duty

Tractor PTO HP range: 38–48 hp

<b>Model</b>	
<b>TPR84</b>	7-foot

- Designed for large estate, ranch or farm, and landscape professionals
- Standard slip clutch protects the drive system from impact
- Carbide teeth are extremely strong, last longer and can be replaced one at a time
- Side shields allow for moving more dirt to fill in low spots and have a quick-flip design with a single pin

Specifications	TPR60	TPR72	TPR84
<b>Tractor PTO HP</b>	20–30 hp	25–35 hp	38–48 hp
<b>Tractor Hitch</b>	Cat 1		Cat 1 and 2
<b>Working Width</b>	60"	72"	84"
<b>Approximate Weight</b>	785 lbs	809 lbs	1,160 lbs
<b>Tractor PTO Speed</b>	540 rpm		
<b>Angle Adjustment Increments</b>	0° – 45° L and R		
<b>Number of Pins per Roller</b>	59	71	83
	Standard-Duty		Medium-Duty

# Core Aerators

The Woods core aerator helps reduce soil compaction in heavy soil conditions.

- Case hardened, 1/8-inch-thick spoons core the earth to allow air, water and minerals to revitalize the toughest turf.
- This professional-grade plugger will provide years of maximum productivity for projects ranging from light-duty lawn care to professional landscaping.

## Medium-Duty

Tractor HP range: 20–65 hp

### Models

- PL48** 4-foot
- PL60** 5-foot
- PL72** 6-foot

- Three-point hitch: Cat 1
- Greased journal bearings turn independently for smooth operation



- Reinforced carrier frame holds up to 1000 lbs. of weight to increase penetration
- Optional water weight kit holds up to 52 gallons of water – adds approximately 500 lbs. to increase penetration

Specifications	PL48	PL60	PL72
<b>Tractor Engine HP</b>	20–65 hp		
<b>Tractor Hitch</b>	Cat 1		
<b>Working Width</b>	48"	60"	72"
<b>Overall Width</b>	56"	67.5"	78.5"
<b>Approximate Weight</b>	437 lbs	539 lbs	561 lbs
<b>Tractor Lift (minimum)</b>	500 lbs	600 lbs	700 lbs
<b>Weight Tray</b>	(2) 22" x 14.5"	(2) 22" x 20"	(2) 22" x 25.5"
<b>Spoons</b>	(64) .75" core	(96) .75" core	(96) .75" core
<b>Spoon Penetration</b>	up to 4.5"		
<b>ASAE Quick Hitch Compatible</b>	yes		
Medium-Duty			

# WOODS

## Precision Super Seeders



Seeders

**PSS84** Base seeder with cool season seed box and front disc blades, plus optional legume seed box, warm season seed box and cultipacker

**Woods Precision Super Seeder** gives you the flexibility to handle primary seeding, over-seeding, and applications such as native grasses and food plots

### The Most Versatile Seed Box Combination on the Market

Three seed box options – cool season, warm season, and legume – let you plant anything from rye and oats to prairie grasses, wild flowers, radishes and soybeans.

Efficient, one-pass planting of up to two seed types at one depth and legume seeds at a different depth – with models equipped with three seed boxes.

All seed boxes can be engaged/disengaged independently with a single lynch pin – no tools required.

### Custom Configured for Your Specific Application

Along with seed box combinations, accessories include front spiked rollers, disc blades, and cast iron cultipackers.

## Standard-Duty

Tractor HP range: 25–45 hp

### Model

**PSS48** 4-foot

**PSS60** 5-foot

## Medium-Duty

Tractor HP range: 30–85 hp

### Model

**PSS72** 6-foot

**PSS84** 7-foot

**Spiked Rollers or Disc Blades**

Choice of front spiked rollers or disc blades, depending on application

**Ground Driven**

Simple, chain-driven ground drive ensures durability and fuel efficiency

**Structure**

Heavy plate steel and tube frame for life-long durability in all planting conditions



**Calibration Tray**

Quickly and accurately measures seed rate

**Cast Iron Cultipacker**

Firms seed bed for perfect seed-to-soil contact and to trap moisture for germination

**PSS84**

Specifications	PSS48	PSS60	PSS72	PSS84
<b>Tractor Engine HP</b>	25-40 hp	30-45 hp	30-75 hp	35-85 hp
<b>Tractor Hitch</b>	Cat 1 & 2			
<b>Working Width</b>	48"	60"	72"	84"
<b>Drive Type</b>	Ground			
<b>Number of Seed Boxes Available</b>	3			
<b>Seed Metering</b>	Fluted and Picker Wheel			
<b>Seed Cups</b>	7	8	10	12
<b>Seed Box Ratio</b>	2-speed			
<b>Cool Season Seed Box Capacity (bushel)</b>	4.00	5.00	6.00	7.00
<b>Native Warm Season Grass Seed Box Capacity (bushel)</b>	5.00	6.25	7.5	8.75
<b>Legume Seed Box Capacity (bushel)</b>	1.00	1.25	1.50	1.75
<b>Front Roller Spikes</b>	(128) .5" x 2" carbide steel	(160) .5" x 2" carbide steel	(192) .5" x 2" carbide steel	(224) .5" x 2" carbide steel
<b>Disc Blades</b>	(6) 18"	(8) 18"	(10) 18"	(12) 18"
<b>Cast Iron Cultipacker Weight</b>	211 lbs	263 lbs	316 lbs	368 lbs
<b>ASAE Quick Hitch Compatible</b>	yes			
	Standard-Duty		Medium-Duty	

seed boxes

# WOODS

## Pulverizers



SU184 with optional second roller

Woods professional-grade pulverizers loosen, level and pulverize a wide variety of materials.

- Tough, H-beam construction with heat-treated steel pins welded into the roller for years of superior performance
- Add a second roller to any model to double your pulverizing action and create smoother finishes

### Standard-Duty

Tractor HP range: 15–45 hp

#### Models

- 20A148** 4-foot
- 20A160** 5-foot

- Three-point hitch: Limited Cat 1 and 1
- Great for use on subcompact or compact tractors
- Ten-inch wide, flange H-beam frame provides weight of 49 lbs. per foot
- Two, 150 lb. compression springs force roller pins into soil for deep penetration and constant contact
- Durable 3/8-inch by 1-1/8-inch, high-carbon steel pins ensure cloddy and hard-packed soil is completely pulverized

Big Teeth



Standard Teeth



#### Hardened Steel Spikes

Break up even hard, compacted soil.

# Medium-Duty

Tractor HP range: 30–65 hp

### Models

<b>SU172</b>	6-foot
<b>SU172BT</b>	6-foot
<b>SU184</b>	7-foot
<b>SU184BT</b>	7-foot

- Three-point hitch: Cat 1
- Self-aligning 1-inch bearings mean less down time
- Twelve-inch wide, flange H-beam frame provides weight of 53 lbs. per foot
- “Big Tooth” models feature .5-inch by 2-inch by 13-inch

Second Roller	4'	5'	6'	7'
<b>Approximate Weight</b>	105 lbs	125 lbs	145 lbs	165 lbs
<b>Roller Diameter</b>	6.625" OD			
<b>Roller Pins</b>	.375" diameter x 1.125"			
<b>Springs</b>	(2) 75 lb. comp.			

Specifications	20A148	20A160	SU172	SU172BT	SU184	SU184BT
<b>Tractor Engine HP</b>	up to 45 hp		up to 65 hp			
<b>Tractor Hitch</b>	Limited Cat 1 and 1		Cat 1			
<b>Working Width</b>	4'	5'	6'		7'	
<b>Overall Width</b>	54"	66"	78"		90"	
<b>Overall Height</b>	36"					
<b>Approximate Weight</b>	480 lbs	550 lbs	715 lbs	735 lbs	784 lbs	805 lbs
<b>Depth Front to Back</b>	28.3"		30.5"			
<b>Front Scarifying Teeth</b>	(9) .625" x 8" alloy steel	(11) .625" x 8" alloy steel	(14) .625" x 8" alloy steel	(14) .5" x 2" x 13" hardened	(16) .625" x 8" alloy steel	(16) .5" x 2" x 13" hardened
<b>Rear Scarifying Teeth</b>	(8) .625" x 8" alloy steel	(10) .625" x 8" alloy steel	(13) .625" x 8" alloy steel	(13) .5" x 2" x 13" hardened	(15) .5" x 8" alloy steel	(15) .5" x 2" x 13" hardened
<b>Bearings</b>	1" self-aligning					
<b>Big Tooth</b>	–	–	–	standard	–	standard
<b>Roller Pins</b>	.375" x 1.125" hardened pins					
<b>H-Beam Dimensions</b>	10" x 10", 49 lbs / ft		10" x 12", 53 lbs / ft			
<b>Springs</b>	(2) 150 lbs compression springs					
<b>ASAE Quick Hitch Compatible</b>	yes					
	Standard-Duty			Medium-Duty		

# WOODS

## Rotary Tillers



TCR74

Woods' line of rotary tillers couples the best design features with outstanding performance for the discerning user. Our TS and TC series tillers will handle all of your landscaping and gardening projects with ease.

- TS and TC models available as either forward or reverse rotation tines
- On initial pass reverse rotation tillers will often till deeper and faster than forward rotation models
- GHT-series for up to 50 hp, and SGT for up to 70 hp tractors are ideal for commercial applications
- Slip clutch driveline protection is standard on all models
- Skid shoes standard

### Standard-Duty

Tractor HP range: 18–30 hp

#### Models

<b>TS/TSR44</b>	44-inch
<b>TS/TSR52</b>	52-inch
<b>TS/TSR60</b>	60-inch

- Three-point hitch: Limited Cat 1 and 1
- Specifically designed for subcompact tractors
- Perfect tool for estate-size properties
- Rugged steel tines can till seven inches into tough ground
- Solid steel rotor shaft

Tractor HP range: 20–45 hp

#### Models

<b>TC/TCR60</b>	60-inch
<b>TC/TCR68</b>	68-inch
<b>TC/TCR74</b>	74-inch

- Three-point hitch: Cat 1
- Specifically designed for compact tractors
- Heavy-duty rear tailgate evenly distributes dirt – leaves a smooth, flat seed bed
- Strong, cast iron gearbox withstands rugged use
- Solid steel rotor shaft

## Medium-Duty

Tractor HP range: 30–50 hp

### Models

**GHT60** 57-inch  
**GHT72** 69-inch

- Three-point hitch: Cat 1
- Rotor shaft guard prevents wrapping on end bearing
- Adjustable, four-position skid shoes control tilling depth
- Heavy-duty gear transmission drives blades for added power and extended life
- Cast iron gearbox housing with beveled gears
- Sprockets with hardened teeth and splined center in enclosed bath
- Tapered roller bearings
- Reinforced A-frame for extended life



GHT60



### Made in America

Woods products are proudly made in the USA. As part of a global economy, we work with business partners around the world and export our equipment to farmers, ranchers, and contractors in international markets. Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.

## Heavy-Duty

Tractor HP range: 40–70 hp

### Models

**SGT72** 68-inch  
**SGT80** 76-inch  
**SGT88** 84-inch

- Three-point hitch: Cat 2
- Extra heavy-duty gear transmission drives blades in toughest conditions
- Cast iron housing with beveled gears
- Sprockets with hardened teeth and splined center in enclosed bath
- Twenty-position adjustable skid shoes with replaceable wear plates for easy maintenance
- Guard on rotor shaft prevents wrapping on end bearing
- Reinforced A-frame for extended life

# WOODS

## Rotary Tillers

Woods offers tillers in forward or reverse rotation in 44" – 74" widths.

Forward rotation tillers are ideal for moist, wet, rocky, sandy or loose soil conditions.

Reverse rotation tillers work best in non-rocky soil conditions. They deliver a smoother top layer of soil by allowing ground cover to travel over the rotor top first, then incorporating it back into the ground beneath a fresh new layer of dirt. More often than not, users can achieve an exceptional seed bed with fewer passes when using a reverse rotation tiller.



**Woods** care™

Maintain the quality and performance of your Woods equipment with WoodsCare genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

Specifications	TS/TSR44	TS/TSR52	TS/TSR60	TC/TCR60	TC/TCR68
Tractor PTO HP	18–30 hp			20–45 hp	
Tractor Hitch	Limited Cat 1 and 1			Cat 1	
Tilling Width	44"	52"	60"	60"	68"
Weight	396 / 404 lbs	426 / 435 lbs	467 / 473 lbs	597 / 604 lbs	634 / 641 lbs
Maximum Tilling Depth	7"	7"	7"	7.5"	7.5"
Drive Type	#80 Chain				
Standard Number of Tines/ Number of Flanges	20 / 5	24 / 6	28 / 7	42 / 7	48 / 8
Number of Tines per Flange	4 C-Type (6 optional)			6 C-Type	
Rotor Shaft RPM	240 rpm				
PTO Driveline Protection	slip clutch				
Tractor PTO Speed RPM	540 rpm				
Gearbox Housing	cast aluminum			heavy duty cast iron	
Gearbox Drain Plug	yes				
Convertible Side Shift (right)	7.5"	11.5"	15.5"	19.5"	
Quick Hitch Compatible	yes				
	Standard-Duty				



TC/TCR74	GHT60	GHT72	SGT72	SGT80	SGT88
20–45 hp	30–50 hp		40–70 hp		
	Cat 1		Cat 2		
74"	57"	69"	68"	76"	84"
665 / 672 lbs	611 lbs	686 lbs	878 lbs	961 lbs	996 lbs
7.5"	7.25"		8.25"		
#80 Chain	gearbox				
54 / 9	28 / 7	36 / 9	36 / 9	40 / 10	44 / 11
6 C-Type	4 C-Type (6 optional)				
	211 rpm		213 rpm		
	slip clutch				
	540 rpm				
	heavy duty cast iron				
	yes				
22.5"	–	–	–	–	–
	no				
	Medium-Duty		Heavy -Duty		

## Post Hole Diggers



Post Hole Diggers

PHD65

**Heavy-duty welded construction, a rugged gearbox with tapered roller bearings, spring-loaded seals, and forged steel teeth offer the durability you need for big or small jobs – whatever the soil conditions.**

- Use for tree and shrub planting, deck or fence post installation, and many other digging needs
- Range of auger bit diameters meet your unique needs – whether landscaping, farming or municipal use

### Standard-Duty

Tractor HP range: 14–35 hp

#### Models

**PHD25**  
**PHD35**

- Three-point hitch: Cat 0, Limited 1 and 1
- Choose 6-, 9- or 12-inch diameter augers

### Medium-Duty

Tractor HP range: 25–65 hp

#### Model

**PHD65**

- Three-point hitch: Cat 1 and 2
- Choose 6-, 9-, 12-, 14-, 18- or 24-inch diameter augers

# Heavy-Duty

Tractor HP range: 35–95 hp

## Model PHD95

- Three-point hitch: Cat 1 and 2
- Rugged gearbox protected from dirt and moisture to handle heavy-duty projects
- Forged steel teeth and tempered iron points dig deeply
- Shear pin protected shaft extends service life
- Owner's manual tube retains manual for quick retrieval
- Options include parking stand, auger extension, semi-double and double flight augers



### Standard Auger Bits

Size—Diameter x Length		Models
6" x 30"	standard-duty	PHD25
9" x 30"	standard-duty	PHD25
12" x 30"	standard-duty	PHD25
9" x 42"	standard-duty	PHD35
12" x 42"	standard-duty	PHD35
6" x 42"	heavy-duty	PHD35, PHD65, PHD95
9" x 42"	heavy-duty	PHD35, PHD65, PHD95
12" x 42"	heavy-duty	PHD35, PHD65, PHD95
14" x 42"	heavy-duty	PHD65, PHD95
18" x 42"	heavy-duty	PHD65, PHD95
24" x 42"	heavy-duty	PHD65, PHD95
30" x 42"	heavy-duty	PHD95
18" x 42"	planting with 9" pilot	PHD65, PHD95
24" x 42"	planting with 9" pilot	PHD65, PHD95

Specifications	PHD25	PHD35	PHD65	PHD95
<b>Tractor PTO HP</b>	14–25 hp	20–35 hp	25–65 hp	35–95 hp
<b>Tractor Hitch</b>	Cat 0 Limited 1 and 1	Cat 1	Cat 1 and 2	
<b>Approximate Weight</b>	149 lbs	160 lbs	206 lbs	210 lbs
<b>Drive Type</b>	gearbox			
<b>Tractor PTO Speed</b>	540 rpm			
	Standard-Duty		Medium-Duty	Heavy-Duty

# WOODS

## Chippers and Shredders



TCH4500

Whether you're creating mulch for the garden or clearing new-growth trees, Woods has the best clean-up tool for you.

- Woods chippers and chipper/shredders are PTO-driven with a three-point hitch mount
- Designed to reduce solid material and debris of up to five-inches in diameter to fine mulch

### Standard-Duty

Tractor HP range: up to 35 hp

**Model**  
**TCH4500 Chipper**

- Three-point hitch: Limited Cat 1 and 1
- Chip capacity of up to 4.5-inch diameter branches
- Heavy-duty, seven-gauge chipper housing for long life
- Manual clutch for tractors with electric PTO
- Easy access to two 5-inch by 4-inch by .375-inch chipper blades for clean out and adjustment
- Optional discharge chute allows debris to be directed into trailer or truck

Tractor HP range: 15–30 hp

**Model**  
**5000 Chipper/Shredder**

- Three-point hitch: Cat 1
- Four reversible, heat-treated steel blades mounted at 90-degrees for smooth operation, less vibration and longer blade life
- Balanced 125 lb. rotor turns 2,000 RPMs
- Thirty-six serrated, free-swinging knives shred debris up to one-inch in diameter
- Optional blower with 360-degree discharge chute allows debris to be directed into trailer or truck

# Medium-Duty

Tractor HP range: 25–60 hp

### Models

**8000 Chipper**

**8100 Chipper**

- Three-point hitch: Cat 1 and 2
- Chip capacity of up to 8-inch diameter branches with 8000 model and 9-inch diameter with 8100 model
- Triple banded belt drive for better transfer of power
- Balanced 1.25-inch by 30-inch, 275 lb. chipping disc
- Four reversible, heat-treated steel with chrome content chipper blades, mounted at 90-degrees for smooth operation, less vibration and longer blade life
- Easy access to blades for clean-out and adjustment
- Standard electronic feed control sensor on 8100 model maintains optimal engine RPM for chipping different diameter material
- 360-degree rotating blower chute with adjustable cap comes standard



8100

Specifications	TCH4500	5000	8000	8100
<b>Tractor PTO HP</b>	up to 35 hp	15–30 hp	25–60 hp	
<b>Tractor Hitch</b>	Limited Cat 1 and 1	Cat 1	Cat 1 and 2	
<b>Capability</b>	chipper	chipper/shredder	chipper	chipper
<b>Chipping Capacity</b>	4.5" diameter	5" diameter	8" diameter	9" diameter
<b>Approximate Weight</b>	392 lbs	450 lbs	885 lbs	1,300 lbs
<b>Feed System</b>	gravity			hydraulic
<b>Feed Rate</b>	–	–	–	0–150 fpm
<b>Shredding Capacity</b>	–	1" diameter	–	–
	Standard-Duty		Medium-Duty	

# WOODS

## Stump Grinders



TSG50

The Woods PTO-powered stump grinders are built to perform – reducing tree stumps to mulch in minutes and grinding below ground level.

- Mount to 3-point hitch and operate from the safety of the tractor seat
- Slip clutches provide protection against abnormally severe shock loads
- Slim design and long reach allow for access to tight places

Tractor HP range: 15–50 hp

**Model TSG50** 20-inch cutting wheel

- Three-point hitch: Cat 1 and 2
- Two hydraulic cylinders raise and lower unit up to 16-inches
- Twenty-four tough, carbide steel teeth cut bi-directionally

Tractor HP range: 50–100 hp

**Model SG100** 34-inch cutting wheel

- Three-point hitch: Cat 1 and 2
- Cutting wheel is pushed, not pulled, extending life of the bearing and gearbox
- Twenty-five tough, carbide steel teeth cut in one direction

Specifications	TSG50	SG100
<b>Tractor PTO HP</b>	15–50 hp	50–100 hp
<b>Tractor Hitch</b>	Cat 1 and 2	
<b>Cutting Wheel Diameter</b>	20"	34"
<b>Cutting Wheel Speed</b>	1,037 rpm	895 rpm
<b>Cutter Tip Speed</b>	5,428 rpm	7,967 rpm
<b>Weight</b>	545 lbs	1,012 lbs
<b>Hub Torque (lbs / ft)</b>	76–250	450

# Disc Harrows

The Woods DHM5, 6- and 7- disc harrows are designed specifically for homes, small farms, and nurseries requiring a durable tillage tool that adds productivity to your tractor.

## Medium-Duty

Tractor HP range: up to 70 hp

### Models

- DHM5** 5-foot
- DHM6** 6-foot
- DHM7** 7-foot

- Three-point hitch: Cat 1
- Eighteen-inch discs are either all notched or notched/smooth combination for maximum productivity
- Angle adjustments of 0-, 7-, 14- and 21-degrees
- Heavy-duty, 3-inch by 3-inch structural tubular construction
- Triple-sealed, self-aligning ball bearings
- Faster, easier and safer hook-ups with ASAE quick-hitch compatibility



Specifications	DHM5	DHM6	DHM7
<b>Tractor Engine HP</b>	28–70 hp	32–70 hp	36–70 hp
<b>Tractor Hitch</b>	Cat 1		
<b>Width</b>	5'	6'	7'
<b>Weight</b>	735 lbs	818 lbs	900 lbs
<b>Disc Diameter</b>	18"		
<b>Disc Quantity</b>	16	20	24
<b>Disc Spacing</b>	7.5"		

\* also available in all notched

## Quick Hitch

Specifications	TOH1
<b>Tractor Hitch</b>	Cat 1
<b>Width</b>	27.25"
<b>Weight</b>	75 lbs
<b>Mounting Pin Diameter</b>	.875"
<b>Adapter Bushing Diameter</b>	1.125"

**Woods Equipment** A Blount International Company  
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2012 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

**B04024D** Revised November 2012



**Printed in the USA** with soy ink on paper using recycled content